

BIOGAS
application
Blower packages



ROBUSCHI®
ROBOX
evolution

CRBIO

GRBIO



ROBUSCHI®
PUMPS AND BLOWERS

BLOWER PACKAGES - biogas application

Robuschi is pleased to introduce the new solutions for BIOGAS applications, especially developed, for the **conveying and compression of biogas, as well as natural and landfill gases in waste water treatment and power generation plants.**

The Blower Biogas Packages have been certified, according to the most important and recent **EC guideline 94/9/EC (ATEX) - group II in category 2**, in order to guarantee the best safety usage in this range of application.

ROBOX evolution BIOGAS

Blower package units, with capacity **up to 2850 m³/h** and differential pressure **up to 1000 mbar**.



The innovative characteristics of the ROBOX evolution: silence, compactness and easy maintenance, remain the hallmarks of this new blower BIOGAS group.

- 1 • RBS blower stage:** with gastight sealing of the driving shaft. It is available, optionally, the blower with a special anticorrosion coating protecting all the blower's components in contact with the gas. The blower is explosion-proof tested and certified up to 12 bar.
- 2 • Suction silencer:** 1.3 bar overpressure PED certificated special design silencer, fabricated in hot galvanized steel with drainage and 12 bar explosion-proof tested. It is also available in the stainless steel version as optional.
- 3 • Baseframe with discharge silencer:** 1.3 bar overpressure PED certificated baseplate and special design discharge silencer, fabricated in hot galvanized steel with drainage device and 12 bar explosion-proof tested. It is also available in the stainless steel version as optional.
- 4 • Spark safe belt guard** in ATEX version.
- 5 • Instruments panel:**
 - **Inlet and outlet pressure gauge indicators:** diaphragm manometer complete of stainless steel accessories (tap and pipes) in ATEX version.
 - **Temperature protection switch in ATEX version**
 - **Pressure protection switches** (optional)
- 6 • Pressure regulator with bypass** for keeping outlet pressure constant (optional). The standard version is equipped with a safety relief valve and a non return VRC valve in ATEX version.

Axial compensators in suction and discharge side in stainless steel.

- The following components are available in addition to the standard version:
 - *Sound enclosure*
 - *Stainless steel gas humidity drainage system with tank*

Other special designs are available upon request.

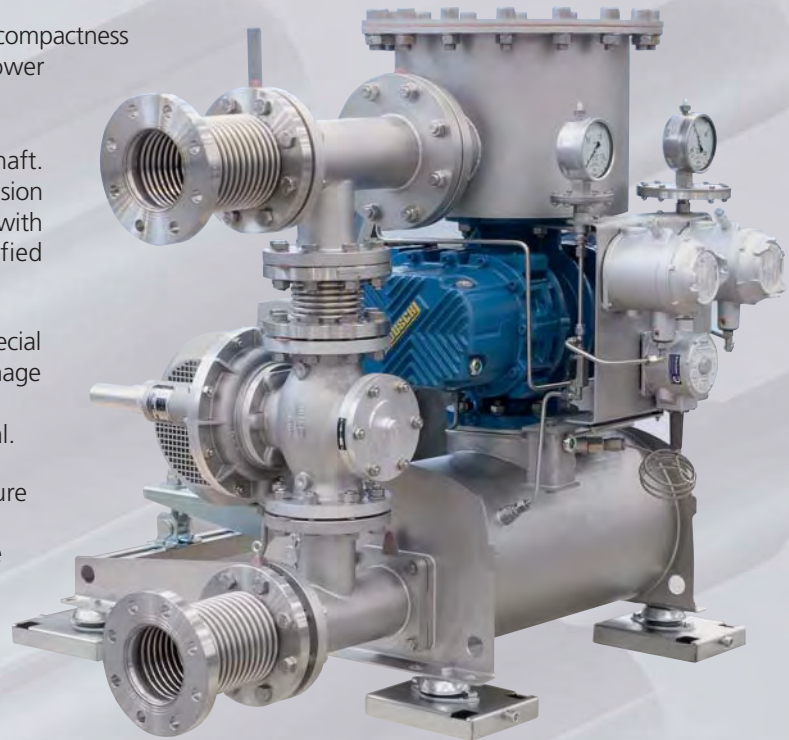

PERFORMANCES

	ROBOX evolution BIOGAS 1	ROBOX evolution BIOGAS 2	ROBOX evolution BIOGAS 3
RBS RANGE	15-25-35	35-45-46-55-65	65-66-75-85-86
Pressure min/max (mbar)	1 / 1000	1 / 1000	1 / 1000
Capacity min/max (m³/h)	240 / 400	400 / 1080	1370 / 2850


CRBIO - GRBIO

Blower package groups, assembled on a skid, with capacity **up to 3280 m³/h** and differential pressure **up to 400 mbar**.

It is available with pulley - belt transmission (GRBIO) and directly coupled (CRBIO).

- 7 • **RBS blower stage:** with the same features of the ROBOX evolution version.
- 8 • **Steel base** with anti-vibration mounts
- 9 • **Non return valve**
- 10 • **Galvanized and / or painted piping**
- 11 • **By-pass safety relief valve**
- 12 • **Coupling guards in ATEX version**

- The following components are available in addition to the standard version:
 - Pressure regulator with bypass for keeping outlet pressure constant
 - Inlet and outlet pressure gauge indicators in ATEX version
 - Temperature protection switch in ATEX version




PERFORMANCES

	CRBIO/GRBIO 1	CRBIO/GRBIO 2	CRBIO/GRBIO 3
RBS RANGE	15-25	35-45-46- 55-65-66	75-85-86
Pressure min/max (mbar)	1 / 400	1 / 400	1 / 400
Capacity min/max (m³/h)	40 / 350	100 / 2040	570 / 3280

DIMENSIONS AND WEIGHT


ROBOX evolution BIOGAS

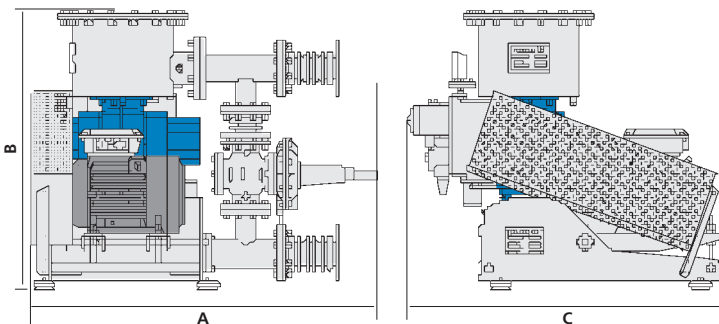

EL	15/1	25/1	35/1	35/2	45/2	46/2	55/2	65/2	65/3	66/3	75/3	85/3	86/3
A	844	862	862	1161	1161	1211	1196	1235	1630	1630	1630	1630	1670
B	745	745	745	1070	1070	1070	1122	1122	1595	1435	1515	1515	1515
C	912	912	985	1265	1265	1265	1265	1265	1695	1695	1695	1695	1695
Kg*	75	80	235	245	245	260	295	310	435	465	495	535	605

* Without motor

CRBIO Directly coupled

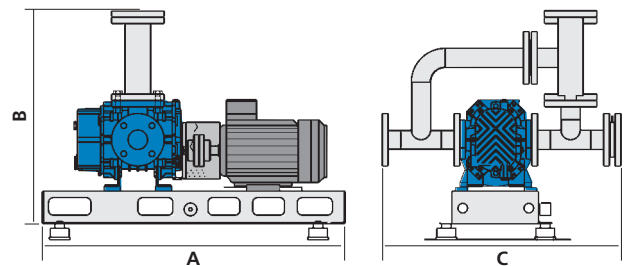

CRBIO	15/1	25/1	35/2	45/2	46/2	55/2	65/2	66/2	75/3	85/3	86/3
A	950	950	950	950	1100	1800	1800	1800	1800	1800	1900
B	630	630	670	670	670	1035	1035	1155	1065	1185	1185
C	726	726	822	822	822	815	815	815	1410	1410	1410

GRBIO Pulley - belt transmission

Many configurations are available.

ROBUSCHI®

G E R M A N Y

Ahner Strasse 5 - 31675 Bückeburg - Germany
Tel. +49 5722 2856-0 - Fax +49 5722 2856-99
E-mail: robuschi@robuschi.de - www.robuschi.de

ROBUSCHI®

D A N M A R K

Fuglebaekvej 3 A, 1 - 2770 Kastrup - Denmark
Tel. +45 70257800 - Fax +45 70 257900
E-mail: sales@robuschi.dk - www.robuschi.dk

ROBUSCHI®

F R A N C E

6, rue de la Grande Borne - 77990 Le Mesnil Amelot - France
Tel. +33 1 60037569 - Fax +33 1 60037577
E-mail: robuschi.fr@wanadoo.fr - www.robuschi.fr

ROBUSCHI®

B E N E L U X

Kanaaldijk 100 - 6956 AX Spankeren - Netherlands
Tel. +31 313 41 5570 - Fax +31 313 41 5433
E-mail: robuschi@robuschi-benelux.nl - www.robuschi-benelux.nl

ROBUSCHI®

U S A I n c.

3801 Beam Road, Suite F - Charlotte, NC 28217
Tel: 704-424 1018 - Fax: 704-424 1019 - Toll free: 877-424-1020
E-mail: sales@robuschiusa.com - www.robuschiusa.com

ROBUSCHI®

C H I N A

218 Tianmu Road West - Suit 1208, Building No. 2, Kerry Everbright City - 200070 Shanghai - China
Tel. +86 21 6317 5461 / +86 21 6317 6461 - Fax +86 21 6317 7312
E-mail: robuschichina@robuschichina.com - www.robuschichina.com

ROBUSCHI®

d o B R A S I L

Centro Administrativo Rio Negro - Conjuntos 25 e 26 - Edifício Jaçari - Alameda Rio Negro 585
CEP 06454-000 - Alphaville/Barueri - SP - Brasil
Tel +55 11 4191-2322 - Fax +55 11 4191-2277
E-mail: robuschi@robuschi.com.br - www.robuschi.com.br

ROBUSCHI®

ROBUSCHI s.p.A.
Head office and factory

Via S. Leonardo, 71/A - 43122 Parma - Italy
Tel. +39 0521 274911/91 - Fax +39 0521 771242
E-mail: robuschi@robuschi.it - www.robuschi.com

FILIALE DI MILANO
Via XXV Aprile, 2 - 20097 S. Donato (Milano) - Italy
Tel. +39 02 51628065 - Fax +39 02 51620224
E-mail: robuschimi@robuschi.it

FILIALE DI PADOVA
Piazza Zanellato,5 - 35129 Padova - Italy
Tel. +39.049.8078260 - Fax +39.049.8078183
E-mail: robuschimd@robuschi.it